




**FIG. 1**  
PRIOR ART

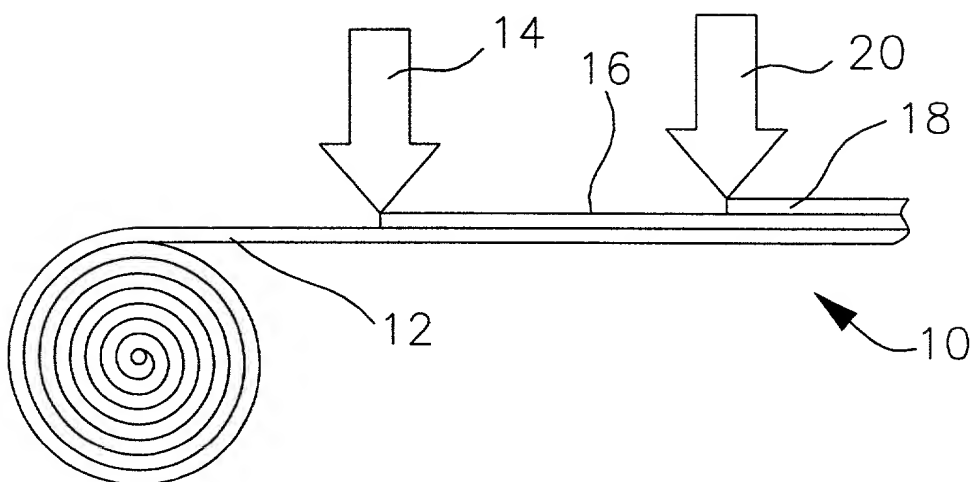


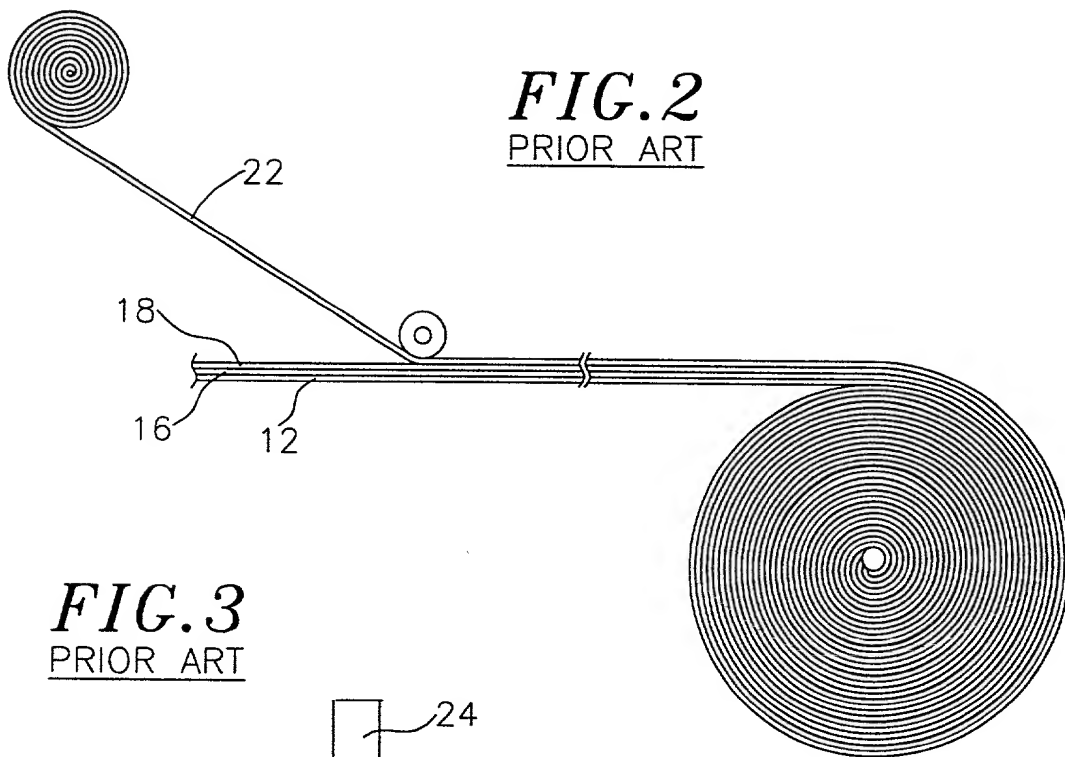

**FIG. 3**  
PRIOR ART

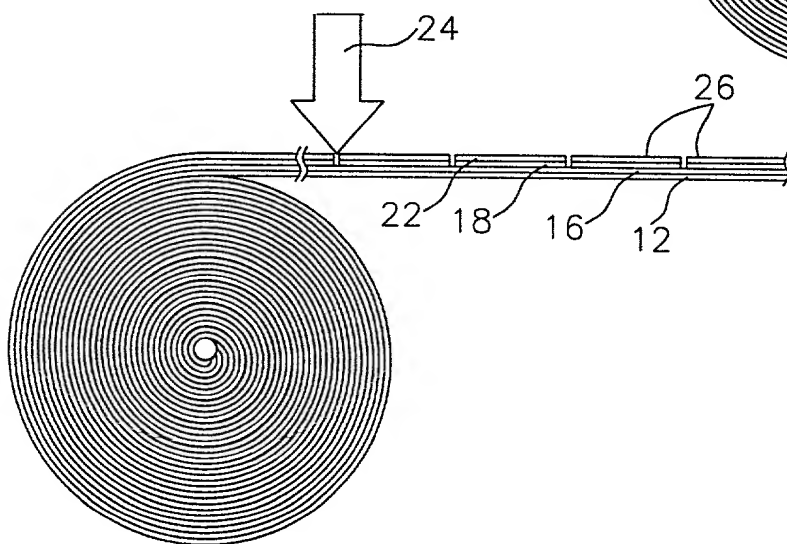

*FIG. 4*

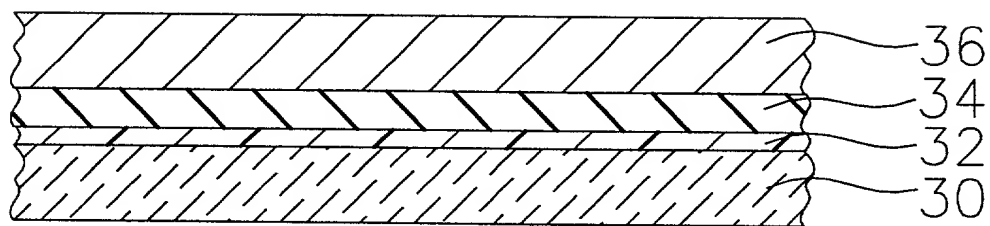

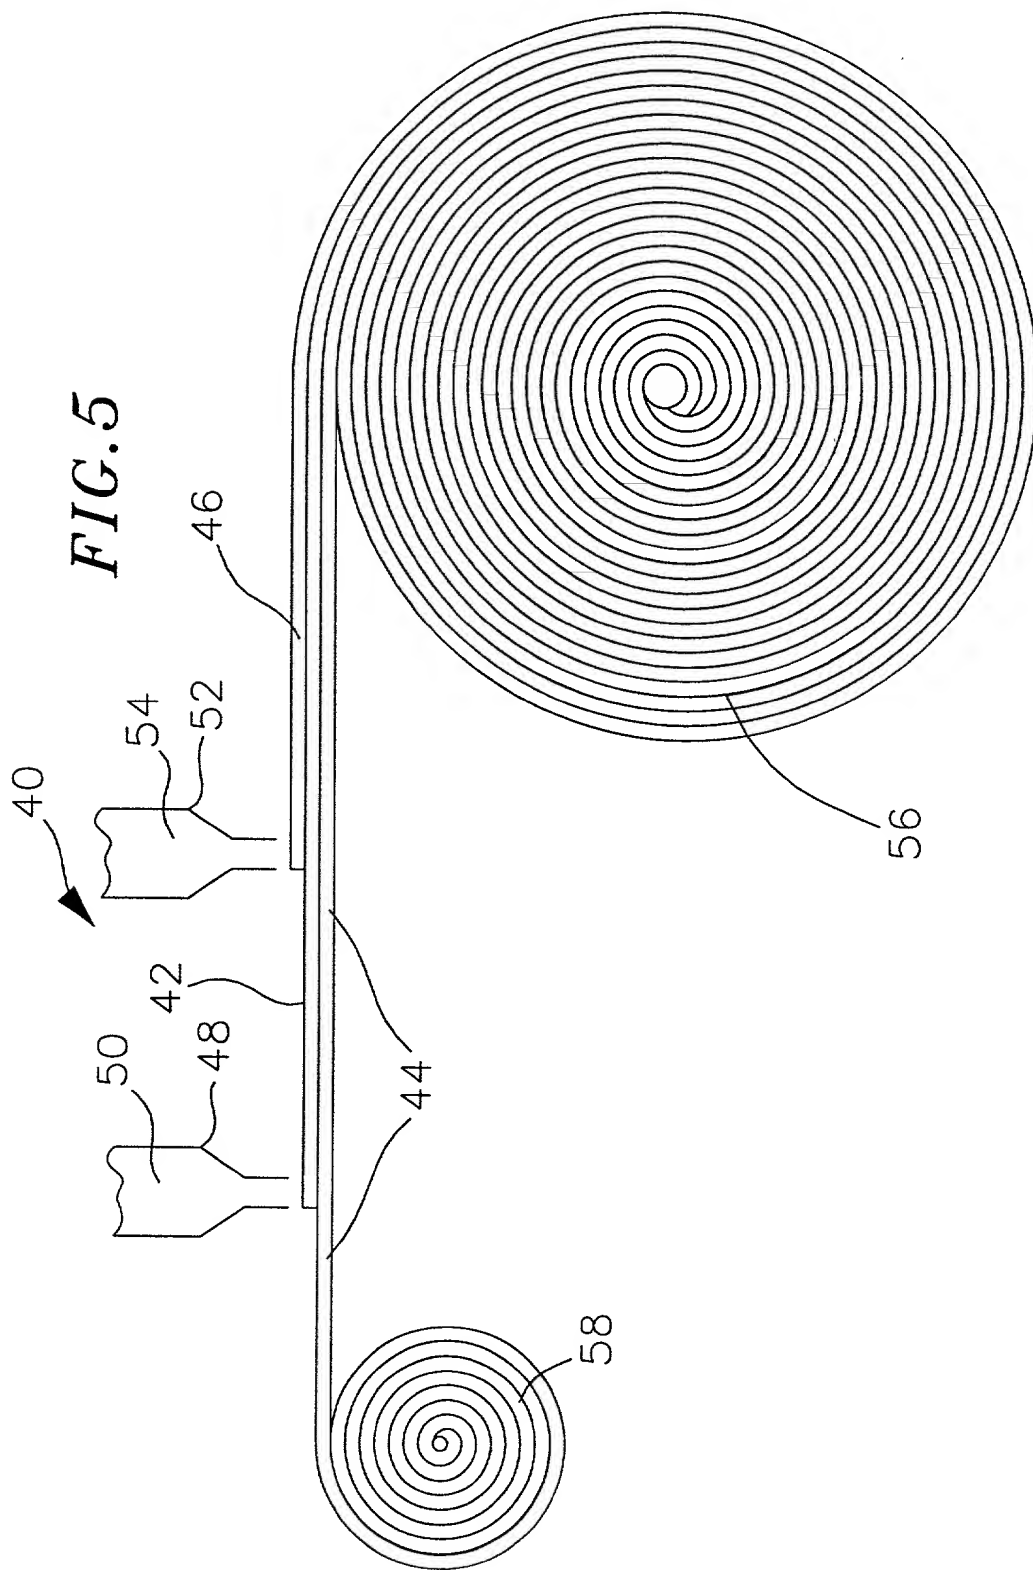


FIG. 6 is a schematic diagram of a device 60, which includes a base 62, a first coil 74, a second coil 80, and a third coil 72. The device 60 is configured to provide a magnetic field to a target area 64. The first coil 74 is positioned at the base 62, and the second coil 80 is positioned at the top of the device 60. The third coil 72 is positioned between the first coil 74 and the second coil 80. The target area 64 is located between the first coil 74 and the second coil 80. The device 60 is configured to provide a magnetic field to the target area 64.



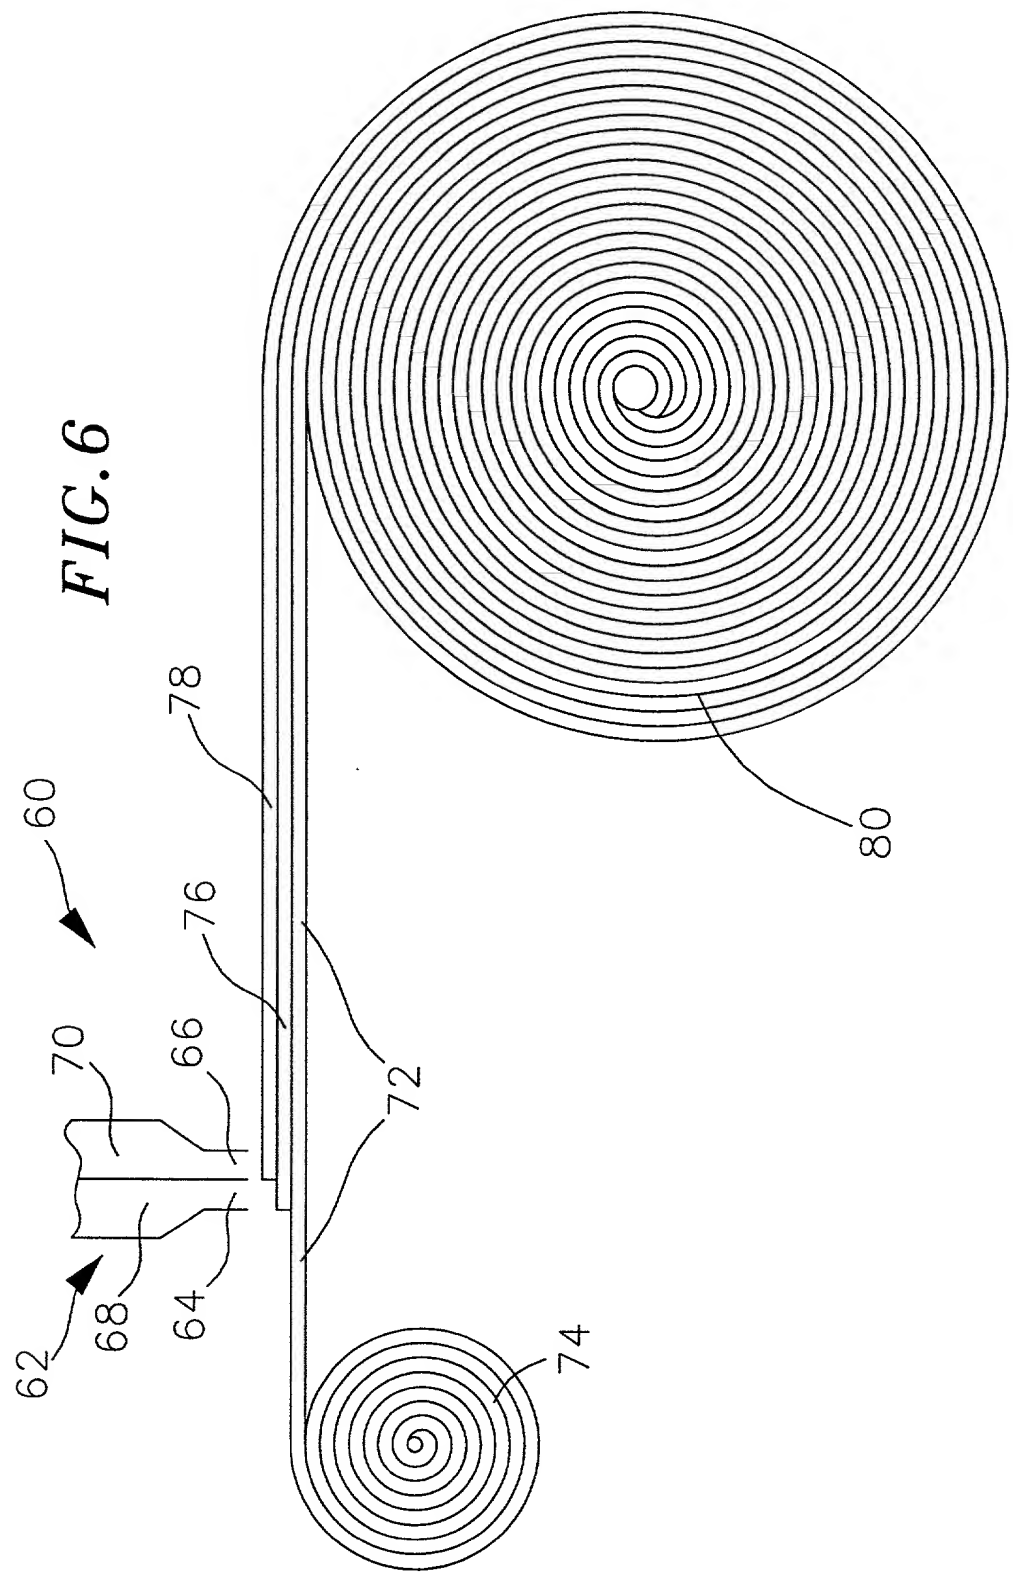


FIG. 6


*FIG. 7*

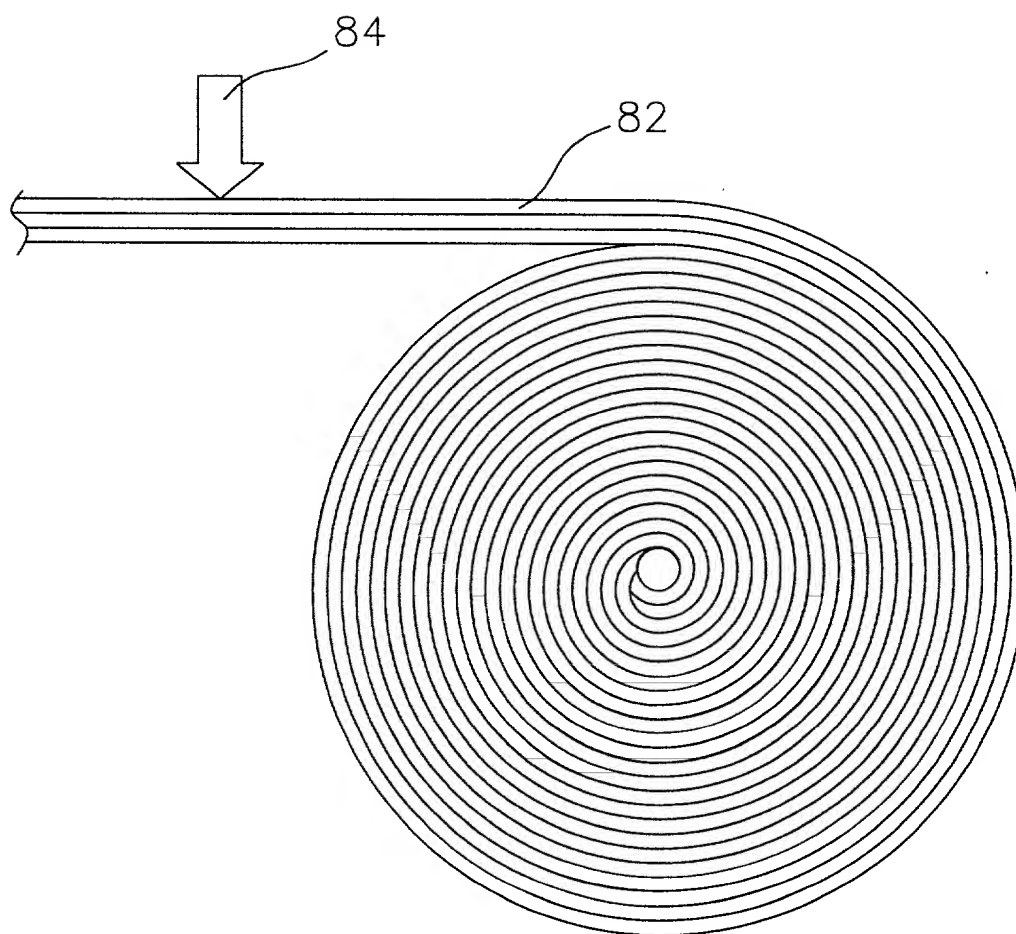


**FIG. 8**

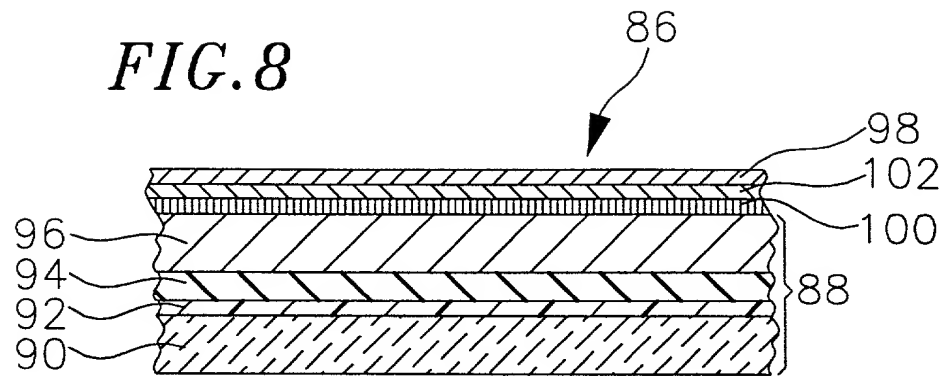

**FIG. 9**

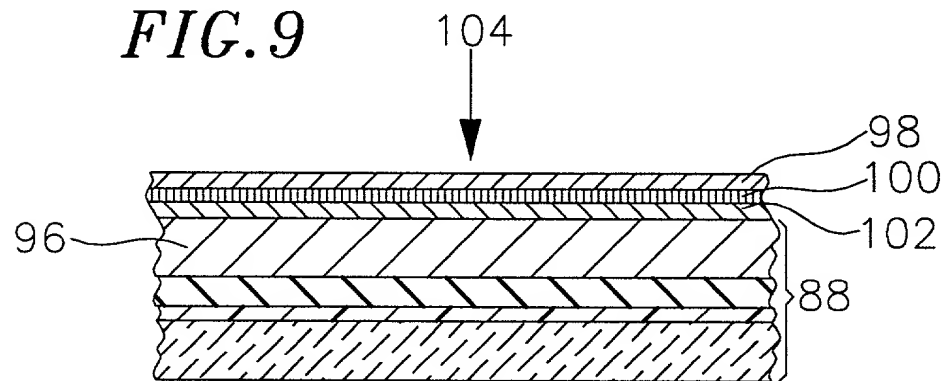

**FIG. 10**

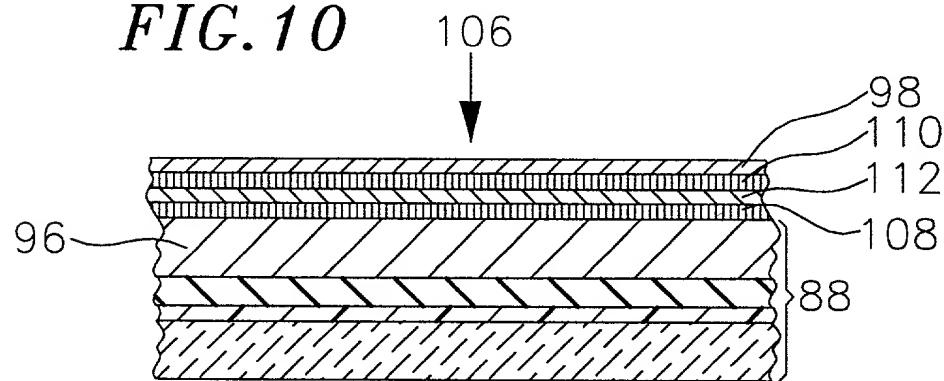

**FIG. 11**

